


# Product Specifications



*X-Beam*



# X-Beam

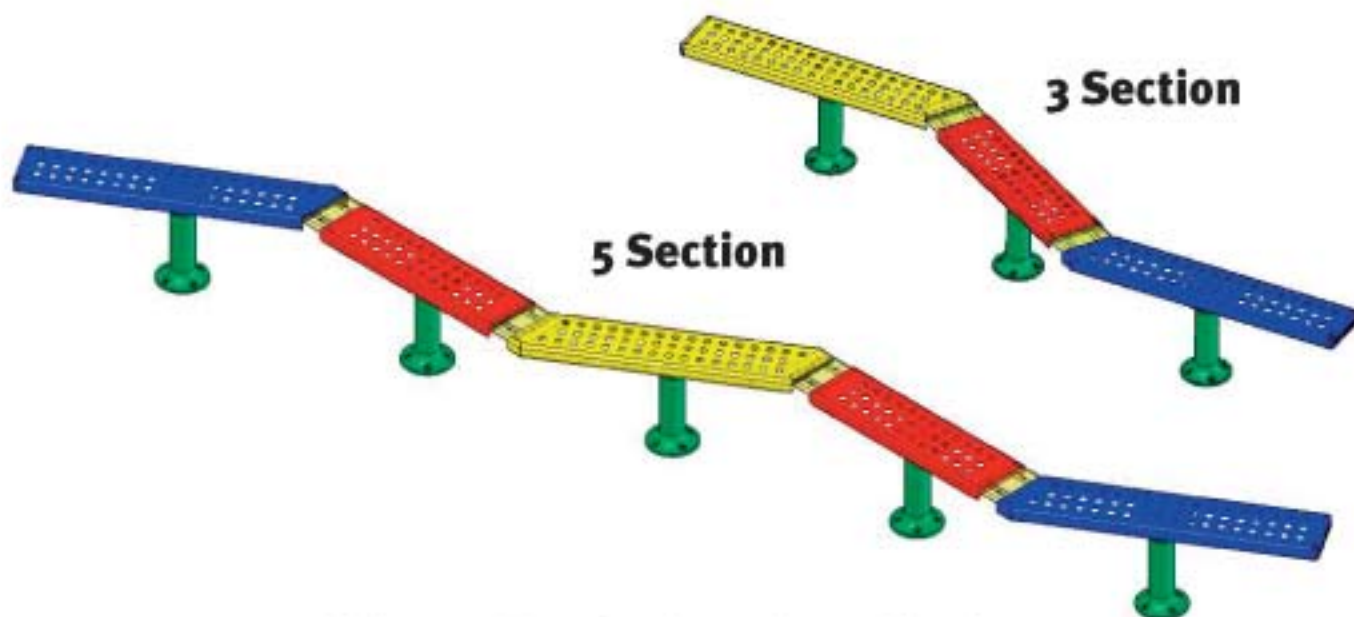

## Playmotion Product Specifications

All Playmotion products utilize a flexible polymer material which is certified by IPEMA (International Play Equipment Manufacturers Association) to meet or exceed ASTM F1487-05 – Standard Consumer Safety Performance Specification for Playground Equipment of Public Use. This material contains colorants and UV inhibitors molded in to the part to prolong the life of the polymer. Playmotion products are warranted for a period of three years from the date of purchase against any defects of workmanship or failures under normal use and service. The Playmotion polymer has a Shore Hardness of 75-90A, depending on application, with a minimum Ultimate Tensile Strength of 4100 PSI and a minimum Elongation of 425%.

### **3 Section**

**Use Zone:** 17' x 27'

**Size (L x W x H):** 138" x 17" x 10"

**Fall Height:** 11"

**Weight of Product:** 145 lbs.

**Capacity:** 10 Children, ages 5-12

**Material:** (3) PVC dipped 12 gauge steel perforated sections, (3) 15" polymer legs, (2) no pinch hinges, (4) hinge plates, hardware, UV-stabilized PVC (mildew resistant), PVC formulation complies with the California Assembly Bill #1108

### **5 Section**

**Use Zone:** 17' x 40'

**Size (L x W x H):** 226" x 17" x 10"

**Fall Height:** 11"

**Weight of Product:** 236 lbs.,

**Capacity:** 15 Children

**Material:** (5) PVC dipped 12 gauge steel perforated sections, (5) 15" polymer legs, (4) no pinch hinges, (8) hinge plates, hardware, UV-stabilized PVC (mildew resistant), PVC formulation complies with the California Assembly Bill #1108

Xccent Play! - [www.xccentplay.com](http://www.xccentplay.com)  
100 Industrial Drive  
Osceola, WI 54020  
(800) 933-4748 (715) 294-2236

